JK-798DIII

High Speed Automatic Overlock Machine

Automatic suction function

Automatic suction functioEffectively remove cloth, dust and fluff, residual thread, keep your workstation clean.

Automatic trimming function

Easily cut off the thread chain with the cutter, no need to pull backand cut thread.

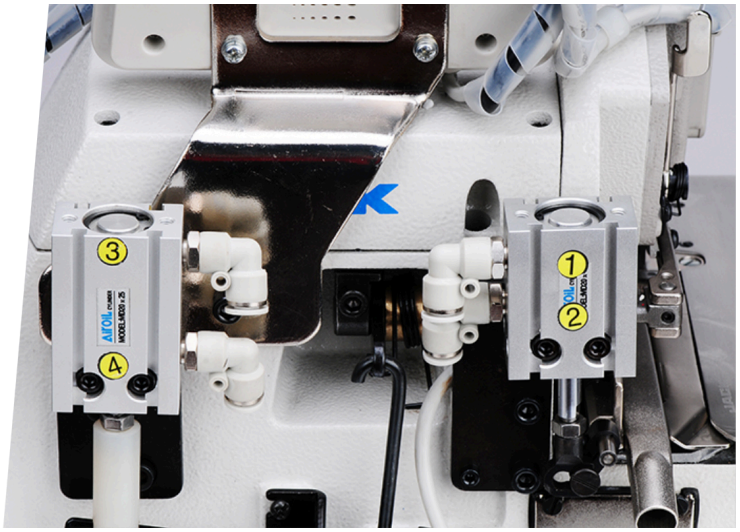

Easy to operate
Easy to use

Operation panel with LCD display, automatic, semi–automatic and manual three kinds of sewing patterns as switch, easy to operate.

8 level luminance adjustable LED light

Adjustable luminance, easily operate and ease the tiredness of eyesight.

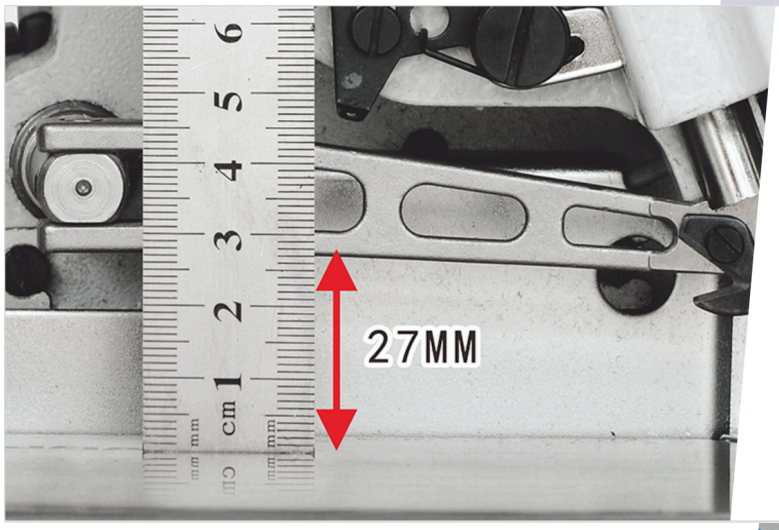

Wide range of application

Standard height of presser foot is 6mm,operation space enlarged to 27mm, strengthen the force to sewing heavy material.

Optimized hand wheel design

Copied hand print design, operation more easily; Ventilation design with high airflow, faster heat dissipation, more endurable.

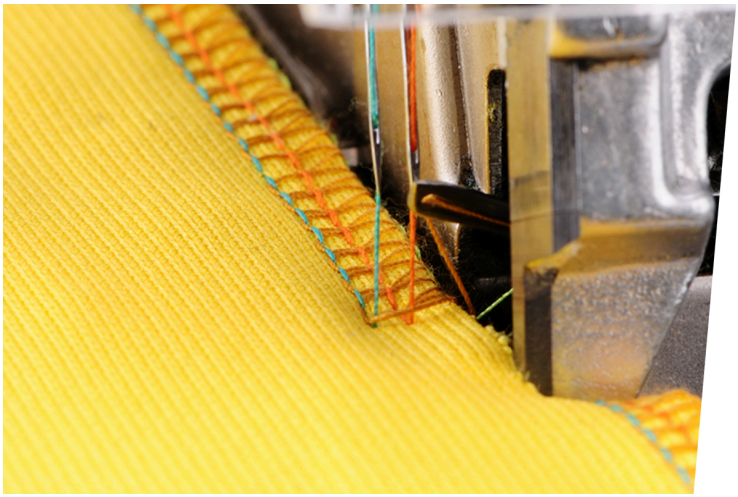

Tension adjustment

Easy to adjust thread tension with beautiful stitch.

Model	Needle	Needle Number	Thread Number	Needle Guage (mm)	Stitch Width (mm)	Stitch Lenght (mm)	Differential Ratio	Height of Presser Foot (mm)	Sewing Speed (S.p.m)	Volume (mm)	Weight(kg)
JK-798DIII-3-504-02/233	9#	1	3	——	4	3.8	0.7-2	5	7000	505*360*565	29.2/39.8
JK-798DIII-3-504-32R2/233	9#	1	3	——	1.5	3.8	0.7-2	5	7000	505*360*565	29.2/39.8
JK-798DIII-4-514-M03/333	9#	2	4	2	4	4.2	0.7-2	5.5	7000	505*360*565	29.2/39.8
JK-798DIII-4-514-M03/333/H/M	11#	2	4	2	4	4.2	0.7-2	6	7000	505*360*565	29.2/39.8
JK-798DIII-5-516-03/333	14#	2	5	3	4	3.8	0.7-2	5	7000	505*360*565	29.2/39.8
JK-798DIII-5-516-03/233	19#	2	5	5	5	3.8	0.7-2	5	7000	505*360*565	29.2/39.8
JK-798DIII-5-516-A04/435	14#	2	5	5	6	5	0.8-1.5	7	6500	505*360*565	29.2/39.8