


MARTE COLLO E POLSI

PRESSA DA STIRO COLLO E POLSI A FUNZIONAMENTO PNEUMATICO


COLLAR + CUFF
PNEUMATIC
IRONING PRESS




Versione standard - a forbice
Standard version - scissor closing

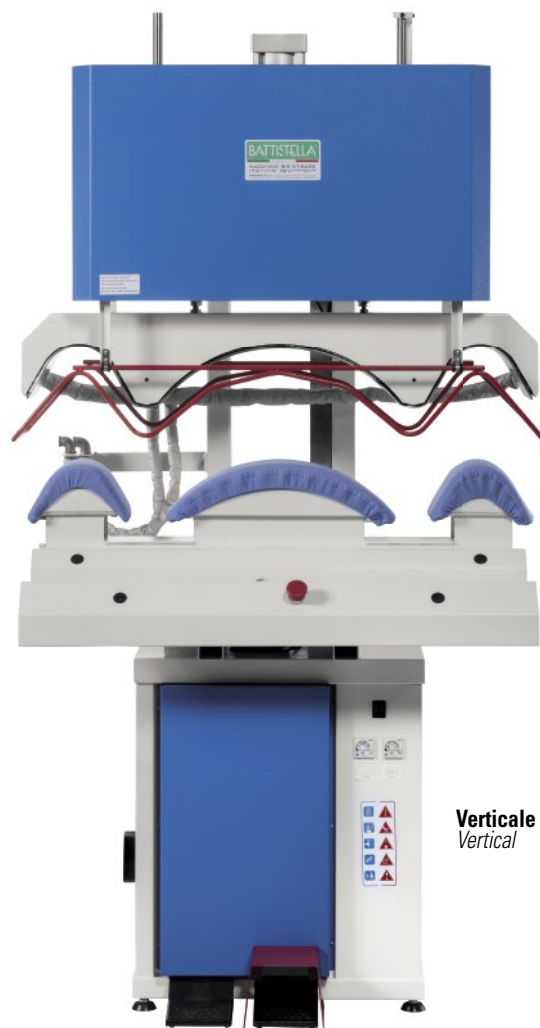

Verticale
Vertical

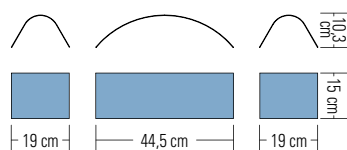

COLLO E POLSO STRETTO
COLLAR AND CUFF TIGHT

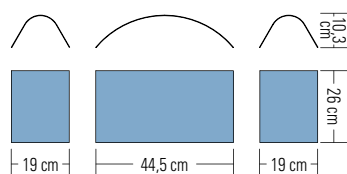

COLLO E POLSO LARGO - TIPO FRANCESE
COLLAR AND CUFF LARGE - FRENCH CUFF

Caratteristiche Tecniche Technical Features

MARTE 2015 VERTICALE VERTICAL

MARTE STANDARD A FORBICE SCISSOR CLOSING

Consumo medio vapore - Average steam consumption	15-20 kg/h	15-20 kg/h
Scarico aspiratore - Vacuum outlet	100 mm	100 mm
Pressione di esercizio vapore - Operating steam pressure	5 BAR (richiesta-requested)	5 BAR (richiesta-requested)
Pressione aria di lavoro - Operating air pressure	6 BAR (richiesta-requested)	6 BAR (richiesta-requested)
Entrata vapore - Steam entrance connection	3/8"	3/8"
Uscita vapore - Steam exhaust connection	3/8"	3/8"
Ingombro - Overall dimensions	108x56x192 H cm	125x110x165 H cm
Peso - Weight	160 kg	210 kg
Imballo - Packing	2,8 m ³	2,8 m ³
Voltaggio standard - Standard Voltage	230 V monofase	230 V monofase
Voltaggio a richiesta - Upon request	120 V - 60 Hz	120 V - 60 Hz

ACCESSORI APPLICABILI A RICHIESTA - ACCESSORIES AVAILABLE BY REQUEST

Caldia interna 24 l. (10-12-15 KW) versione chiusura a forbice - Built-in 24 l. boiler (10-12-15 KW) for scissor closing version
Gruppo e ferro da stiro - Steam iron assembly with iron and iron rest
Compressore da 1,5 HP - 1,5 HP compressor